


Cable reel 1800



- Spring return
- Max. 50m cable
- Steel housing
- Lateral mounting flange
- Can be mounted in any position
- Protection class IP65
- Slip ring isolating voltage 2.5KV
- Slip ring in industrial design
- Max. winding speed 30m/min

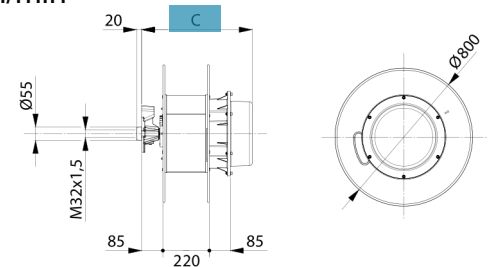

Number of conductors	Conductor cross sections	Cable length	Max. KW rolled up	Max. KW rolled out	Max. Volt	Cable type	Collector capacity	Art. no. with cable	C
12	2,5mm ²	50m	7,5A	7,5A	-	CF130.25.12.UL	32A	2.586.121	540
12	2,5mm ²	50m	7,5A	7,5A	-	CF77.UL.25.12.D	32A	2.586.122	540
18	2,5mm ²	50m	7,5A	7,5A	-	CF5.25.18	32A	2.586.181	560
18	2,5mm ²	50m	7,5A	7,5A	-	CF9.25.18	32A	2.586.182	560
25	1,5mm ²	50m	4,5A	4,5A	-	CF130.15.25.UL	16A	2.586.251	640
25	1,5mm ²	50m	4,5A	4,5A	-	CF77.UL.15.25.D	16A	2.586.252	640
25	2,5mm ²	40m	7,5A	7,5A	-	CF9.25.25	32A	2.586.253	640
4	6mm ²	50m	17,0	22,0	400V3F+T	H07RN-F	60A	2.586.401	470
4	6mm ²	50m	17,0	22,0	400V3F+T	H07RN-F	100A	2.586.402	470
4	10mm ²	50m	25,0	30,0	400V3F+T	H07RN-F	100A	2.586.403	470
4	10mm ²	50m	25,0	30,0	400V3F+T	CF34.UL.100.04.D	100A	2.586.404	470
4	16mm ²	40m	35,0	40,0	400V3F+T	CF30.160.04	100A	2.586.405	470
4	16mm ²	40m	35,0	40,0	400V3F+T	CF34.UL.160.04.D	100A	2.586.406	470
4	25mm ²	40m	45,0	50,0	400V3F+T	CF34.UL.250.04.D	100A	2.586.407	470
5	6mm ²	50m	17,0	22,0	400V3F+T	H07RN-F	60A	2.586.501	470
5	6mm ²	50m	17,0	22,0	400V3F+T	H07RN-F	100A	2.586.502	470
5	10mm ²	50m	25,0	30,0	400V3F+T	CF30.100.05	100A	2.586.503	470
5	10mm ²	50m	25,0	30,0	400V3F+T	CF34.UL.100.05.D	100A	2.586.504	470
5	16mm ²	50m	35,0	40,0	400V3F+T	CF30.160.05	100A	2.586.505	470
5	16mm ²	50m	35,0	40,0	400V3F+T	CF34.UL	100A	2.586.506	470

