


Hose Reel OSM 400

EBINGER

Technisches Equipment



- Spring rewind mechanism
- Latching system
- Max. 20m hose - 1/2" hose
- Casing in painted steel or stainless steel
- Fixed mounting bracket
- Adjustable hose guide
- Mountable in any position

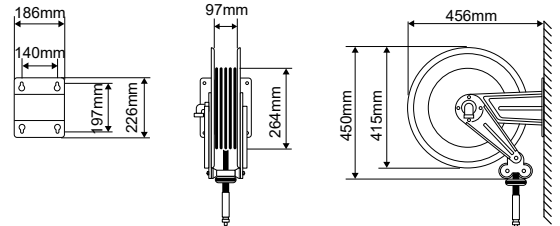

Painted steel



Medium	Length of the hose	Inner Ø	Max. pressure	Max. temp.	Swivel	Swivel connection	Armature	Item-No.
Cold water	without	-	20bar	90°C	brass	1/2" F	-	1.400.100
	20m	1/2"	12bar	50°C	brass	1/2" F	brass coupling	1.400.101
	15m	5/8"	10bar	50°C	brass	1/2" F	brass coupling	1.400.102
Hot water	without	-	20bar	90°C	brass	1/2" F	-	1.400.100
	15m	1/2"	15bar	90°C	brass	1/2" F	brass coupling	1.400.105
	15m	5/8"	15bar	90°C	brass	1/2" F	brass coupling	1.400.106
Compressed air	without	-	20bar	90°C	brass	1/2" F	-	1.400.100
	20m	10mm	20bar	50°C	brass	1/2" F	NW 7,2	1.400.103
	18m	12,5mm	20bar	50°C	brass	1/2" F	NW 7,2	1.400.104
Vacuum	15m	1/2"	5bar	50°C	brass	1/2" F	-	1.400.140
High pressure 100	without	-	100bar	130°C	stainless steel	1/2" F	-	1.400.200
	15m (black)	13mm	100bar	130°C	stainless steel	1/2" F	M22x1,5 F	1.400.202
	15m (blue)	13mm	100bar	130°C	stainless steel	1/2" F	M22x1,5 F	1.400.205
High pressure 200	without	-	200bar	130°C	stainless steel	3/8" F	-	1.400.300
	15m (black)	8mm	200bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.301
	20m (black)	8mm	200bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.302
	17m (black)	10mm	200bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.303
	15m (blue)	8mm	200bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.304
	20m (blue)	8mm	200bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.305
	17m (blue)	10mm	200bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.306
High pressure 400	without	-	400bar	130°C	stainless steel	3/8" F	-	1.400.400
	15m (black)	8mm	400bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.401
	20m (black)	8mm	400bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.402
	17m (black)	10mm	400bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.403
	15m (blue)	8mm	400bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.404
	20m (blue)	8mm	400bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.405
	17m (blue)	10mm	400bar	130°C	stainless steel	3/8" F	M22x1,5 F	1.400.406
Pesticides	without	-	100bar	-	stainless steel	1/2" F	-	1.400.200
	20m	3/8"	20bar	-	stainless steel	1/2" F	1/2" F	1.400.110
	20m	3/8"	40bar	-	stainless steel	1/2" F	1/2" F	1.400.240
	15m	1/2"	40bar	-	stainless steel	1/2" F	1/2" F	1.400.241
Grease	without	-	400bar	60°C	steel zincd	3/8" F	-	1.400.500
	12m	1/4"	400bar	60°C	steel zincd	3/8" F	1/4" M	1.400.501
	18m	1/4"	400bar	60°C	steel zincd	3/8" F	1/4" M	1.400.502
	10m	3/8"	400bar	60°C	steel zincd	3/8" F	3/8" M	1.400.503
	15m	3/8"	400bar	60°C	steel zincd	3/8" F	3/8" M	1.400.504
	15m	1/2"	20bar	60°C	steel zincd	3/8" F	1/2" M	1.400.601
Oil	without	-	500bar	60°C	steel zincd	1/2" F	-	1.400.550
	without	-	150bar	60°C	steel zincd	1/2" F	-	1.400.900
	10m	1/2"	150bar	60°C	steel zincd	1/2" F	1/2" M	1.400.901
	15m	1/2"	150bar	60°C	steel zincd	1/2" F	1/2" M	1.400.902

Hose reel OSM 400

EBINGER

Technisches Equipment

Painted steel



Medium	Length of the hose	Inner Ø	Max. pressure	Max. temp.	Swivel	Swivel connection	Armature	Item-No.
Oxygen - Gas	without 12m	-	20bar	-	brass brass	3/8" F	-	1.400.700
			20bar	-		3/8" F		3/8" F & 1/4" F
Gas LPG	without 18m	-	20bar	-	brass brass	3/8" F	-	1.400.800
			20bar	-		3/8" F		3/8" F-L

Stainless steel



Medium	Length of the hose	Inner Ø	Max. pressure	Max. temp.	Swivel	Swivel connection	Armature	Item-No.	
Cold water	without 20m 15m without	-	20bar	90°C	brass brass brass brass	1/2" F	-	1.404.100	
			12bar	50°C		1/2" F		brass coupling	1.404.101
			10bar	50°C		1/2" F		brass coupling	1.404.102
			20bar	90°C		1/2" F		-	1.404.130
Hot water	without 15m 15m	-	20bar	90°C	brass brass brass	1/2" F	-	1.404.100	
			15bar	90°C		1/2" F		brass coupling	1.404.105
			15bar	90°C		1/2" F		brass coupling	1.404.106
Compressed air	without 20m 18m	-	20bar	90°C	brass brass brass	1/2" F	-	1.404.100	
			20bar	50°C		1/2" F		NW 7,2	1.404.103
			20bar	50°C		1/2" F		NW 7,2	1.404.104
Vacuum	15m	1/2"	5bar	50°C	brass	1/2" F	-	1.404.140	
High pressure 100	without 15m (black) 15m (blue)	-	100bar	130°C	stainless steel stainless steel stainless steel	1/2" F	-	1.404.200	
			100bar	130°C		1/2" F		M22x1,5 F	1.404.202
			100bar	130°C		1/2" F		M22x1,5 F	1.404.205
High pressure 200	without 15m (black) 20m (black) 17m (black) 15m (blue) 20m (blue) 17m (blue)	-	200bar	130°C	stainless steel stainless steel stainless steel stainless steel stainless steel stainless steel stainless steel	3/8" F	-	1.404.300	
			200bar	130°C		3/8" F		M22x1,5 F	1.404.301
			200bar	130°C		3/8" F		M22x1,5 F	1.404.302
			200bar	130°C		3/8" F		M22x1,5 F	1.404.303
			200bar	130°C		3/8" F		M22x1,5 F	1.404.304
			200bar	130°C		3/8" F		M22x1,5 F	1.404.305
			200bar	130°C		3/8" F		M22x1,5 F	1.404.306
High pressure 400	without 15m (black) 20m (black) 17m (black) 15m (blue) 20m (blue) 17m (blue)	-	400bar	130°C	stainless steel stainless steel stainless steel stainless steel stainless steel stainless steel stainless steel	3/8" F	-	1.404.400	
			400bar	130°C		3/8" F		M22x1,5 F	1.404.401
			400bar	130°C		3/8" F		M22x1,5 F	1.404.402
			400bar	130°C		3/8" F		M22x1,5 F	1.404.403
			400bar	130°C		3/8" F		M22x1,5 F	1.404.404
			400bar	130°C		3/8" F		M22x1,5 F	1.404.405
			400bar	130°C		3/8" F		M22x1,5 F	1.404.406
Pesticides	without 20m 15m	-	100bar	-	stainless steel stainless steel stainless steel	1/2" F	1/2" F	1.404.200	
			40bar	-		1/2" F		1/2" F	1.404.240
			40bar	-		1/2" F		1/2" F	1.404.241
Ad Blue	18m	1/2"	20bar	50°C	stainless steel	1/2" F	Cap nut 1"	1.414.220	
Respiratory air	15m	3/8"	10bar	50°C	stainless steel	1/2" F	3/8" M	1.404.260	
Drinking water	15m	1/2"	20bar	50°C	stainless steel	1/2" F	brass coupling	1.404.273	
Food	15m	1/2"	15bar	100°C	stainless steel	1/2" F	brass coupling	1.404.204	
Grease	without 12m 18m 10m 15m	-	400bar	60°C	steel zined steel zined steel zined steel zined	3/8" F	-	1.404.500	
			400bar	60°C		3/8" F		1/4" M	1.404.501
			400bar	60°C		3/8" F		1/4" M	1.404.502
			400bar	60°C		3/8" F		3/8" M	1.404.503
400bar	60°C	3/8" F	3/8" M	1.404.504					
Oil	without 10m 15m	-	100bar	60°C	stainless steel stainless steel stainless steel	1/2" F	-	1.404.200	
			150bar	60°C		1/2" F		1/2" M	1.404.901
			150bar	60°C		1/2" F		1/2" M	1.404.902

Optional accessories

Designation	Material	Item-No.
Cover plate for latching system	ABS	1.410.005
Extension for swiveling wall bracket 180°	stainless steel	1.514.007
Swivling wall bracket, 110°	painted steel	1.110.001
Swivling wall bracket, 110°	stainless steel	1.114.001
Automatic hose guide	painted steel	1.410.010
Automatic hose guide	stainless steel	1.414.010
„Speed control“ rewinding break	Techno-Polymer	1.410.008



Automatic hose guide not suitable for oxygen, gas and duo hoses!
 „Speed control“ rewinding break not combinable with automatic hose guide!
 Cover plate for latching system not combinable with automatic hose guide!

The changeover to RAL 7016 will take place successively

