


# Cable reel X 4000



# EBINGER

Technisches Equipment

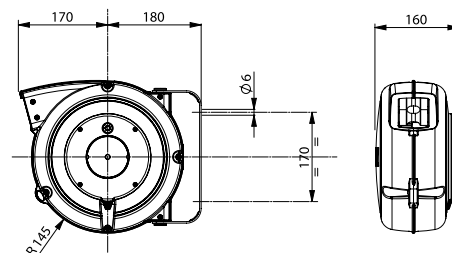

- Spring rewind mechanism
- Latching system
- Max. 16m cable
- Plastic casing shockproof and UV-resistant
- Swiveling mounting bracket
- Mountable in any position
- Protection type IP42



No. of conductors	Conductors section (mm <sup>2</sup> )	Cable length	Max. Watt 	Max. Watt 	V max. (test load)	Cable type	Slipping	Item-No.
1	6mm <sup>2</sup>	16m	-	-	-	H05V-F	10A	2.250.001
1	16mm <sup>2</sup>	11m	-	-	-	H05V-F	10A	2.250.002
2	1mm <sup>2</sup>	18m	900	1400	500V	H05VV-F	10A	2.250.003*
2	1,5mm <sup>2</sup>	16m	1100	1600	500V	H05VV-F	10A	2.250.004*
3	1,5mm <sup>2</sup>	15m	1200	1800	500V	H05VV-F	10A	2.250.005*
3	2,5mm <sup>2</sup>	10m	1900	2500	500V	H05VV-F	10A	2.250.006*
4	1,5mm <sup>2</sup>	11m	1400	1900	500V	H05VV-F	10A	2.250.007
4	2,5mm <sup>2</sup>	9m	2000	2700	500V	H05VV-F	10A	2.250.008
5	1mm <sup>2</sup>	11,5m	1000	1500	500V	H05VV-F	10A	2.250.009
5	1,5mm <sup>2</sup>	9m	1400	1900	500V	H05VV-F	16A	2.250.010
2	1mm <sup>2</sup>	13m	900	1400	750V	H07RN-F	10A	2.255.003*
3	1,5mm <sup>2</sup>	10m	1200	1800	750V	H07RN-F	10A	2.255.005*
3	2,5mm <sup>2</sup>	8m	1900	2500	750V	H07RN-F	10A	2.255.006*
4	1,5mm <sup>2</sup>	9m	1400	1900	750V	H07RN-F	10A	2.255.007
5	1,5mm <sup>2</sup>	8m	1400	1900	750V	H07RN-F	10A	2.255.010

\*Cable reel with incorporated thermic protection

Cable reel with 3x1,5mm<sup>2</sup>, 3x2,5mm<sup>2</sup> incl. Schuko plug and socket

Cable reel with 5x1,5mm<sup>2</sup> incl. CEE-connection 16A

Accessories	Item-No.
Device to fix the wall bracket	2.259.001

# EBINGER

Technisches Equipment

**Ebinger GmbH**  
Edesheimer Straße 51  
D-76835 Rhodt /  
Germany

Fon +49 (0)6323-937 465-0  
Fax +49 (0)6323-937 465-20

info@ebinger-gmbh.com  
www.ebinger-gmbh.com

